FIXINGS

Underfloor Heating Grid Membrane 1.2m Wide


Printed grid for setting out pipe centres.

A 1.2m wide printed grid membrane for wet underfloor heating. Roll it over the insulation before screeding to set out 100, 150 or 200mm pipe centres quickly, and to give tacker clips a tough layer to grip.

CODES

MH-GRID-1.2x50, MH-GRID-1.2x100

PRODUCT

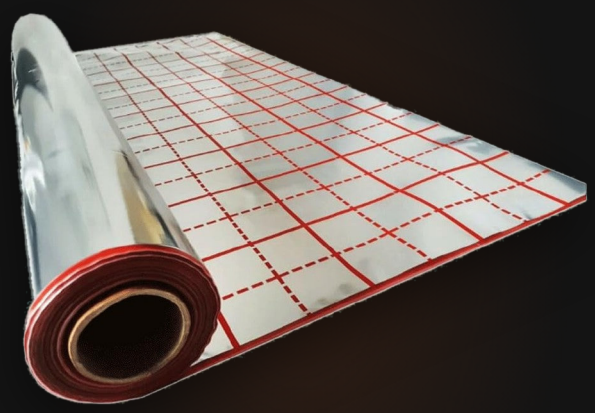

01 · IN THE BOX

What you get

- 1 roll of grid membrane

02 · YOU WILL NEED

Tools and materials

- Sharp knife
- Tape measure
- Tape to hold the laps

03 · SAFETY

Before you start

- Installation should be carried out by a competent installer, in line with the system design and BS EN 1264.
- Wear gloves and eye protection when cutting pipe, handling metal plates or using hand tools.
- Release system pressure and let pipework cool before cutting into or disturbing any filled pipe.

04 · INSTALLATION

Fit it in 5 steps.

1. Fit the edge insulation, then lay the floor insulation.
2. Roll the membrane out over the insulation with the grid face up.
3. Line the grid up with the pipe layout and trim to fit at walls.
4. Overlap and tape the joints so screed cannot get under the membrane.
5. Lay the pipe along the grid lines at the design centres and fix it with tacker clips.

05 · TESTING AND COMMISSIONING

Test, check, then hand over

- [x] Fill and flush each loop one at a time, vent the air, then raise the system to 6 bar with a test pump.
- [x] Hold 6 bar for 1 hour. A small drop can come from water temperature change; a leak usually shows within the hour.
- [x] Have the test witnessed and signed off, and keep the pipe under pressure while the screed is laid.

06 · QUESTIONS

Asked by installers

What pipe centres does the grid show?

The print lets you set out 100mm, 150mm or 200mm centres.

How much floor does a roll cover?

A 50m roll covers 60m² and a 100m roll covers 120m².

07 · WORKS WITH


Parts that fit with it



High Grip Barbed Pipe Clips



Tacker Gun for 40mm and 60mm Pipe Clips



Edge Insulation Foam Roll

ALSO WORKS WITH

Insulation boards

08 · JOB RECORD

Fill in on site, keep for the handover

Site / room

Installed by

Date

Test result

Notes

SCAN ME

Watch how it works and fits

Point your phone camera at the code to watch the video.

QUESTIONS ON SITE?

sales@maxheatufh.com **07539 499069**

WEB
maxheatufh.com

DELIVERY
Order by 12pm for next working day delivery