
COPPER M-PRESS FITTING PACKS

Copper M-Press Fitting Pack, 15mm and 22mm (110 Fittings)

The everyday 15mm and 22mm fittings in one order.

Puts the everyday 15mm and 22mm copper press fittings in one order: couplings, elbows, equal tees, fitting reducers and reducing tees. 110 fittings, supplied as 11 full bags, pressed cold with M-profile jaws so there is no flame and no solder on site.

CODE
MHF9-KIT-STD110

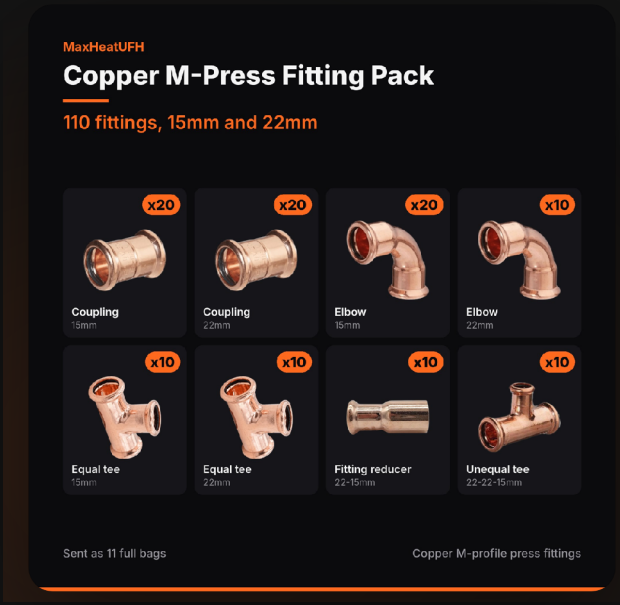

01 · KEY FEATURES

Why installers use it

- 110 fittings across the 8 most-used lines
- Covers both 15mm and 22mm pipework from one box
- Copper fittings with M-profile press ends
- **No flame,** so no hot works permit
- **Supplied as 11 full bags**

IN THE BOX

11 full bags of copper M-press fittings (see the contents table on the data sheet)

02 · SPECIFICATION

Technical data

Contents	110 fittings, 11 full bags
Sizes	15mm and 22mm
Press profile	M-profile
Pipe	Copper tube
Jaws (MaxHeatUFH)	15mm and 22mm fit MH-EHCS and MH-HPEHCS
Packs	Supplied as full bags, not split

03 · DESIGN HELP

Send us your plans

For design help, send your plans to **sales@maxheatufh.com** or plan loops with **MaxHeatUFH ProLoop** at maxheatufh.com.

04 · ORDER CODE

MHF9-KIT-STD110.

One code for this product. Check the specification on page 1 before you order.

05 · PACK CONTENTS

Pack contents

FITTING	SIZE	QTY
Equal Straight Coupling	15mm	20
Equal Straight Coupling	22mm	20
Equal Elbow	15mm	20
Equal Elbow	22mm	10
Equal Tee	15mm	10
Equal Tee	22mm	10
Fitting Reducer	22-15mm	10
Unequal Tee	22-22-15mm	10

Total 110 fittings. All lines are Copper M-Press.

06 · WORKS WITH

Complete the system

- MaxHeatUFH M-Profile Press Jaws
- Electric Hydraulic Press Tool Set (MH-EHCS)
- High Power Electric Hydraulic Press Tool (MH-HPEHCS)
- Copper M-Press Fittings range for top-ups

07 · FITTING AT A GLANCE

Full steps in the install manual

1. Check the pack: 11 bags, 110 fittings, against the contents table.
2. Cut the copper tube square with a pipe cutter and deburr inside and out.
3. Mark the insertion depth on the tube, then push the fitting on fully to the mark.
4. Fit the matching M-profile jaw (15mm or 22mm) to the press tool.

SCAN ME

Watch how it works and fits

Point your phone camera at the code to watch the video for this product.

DESIGN HELP, TRADE ACCOUNTS AND ORDERS

sales@maxheatufh.com 07539 499069

WEB
maxheatufh.com

DELIVERY
Order by 12pm for next working day delivery