MANIFOLDS & COMPONENTS


1" Male x 1" Male Straight Manifold Connector Joins 1" female parts.

A 1" BSP male x male straight connector (nipple) for joining manifold sections, adding an extension, or connecting 1" female valves, pump sets or end units.

CODE

MHF1-SN1Mx1M

PRODUCT

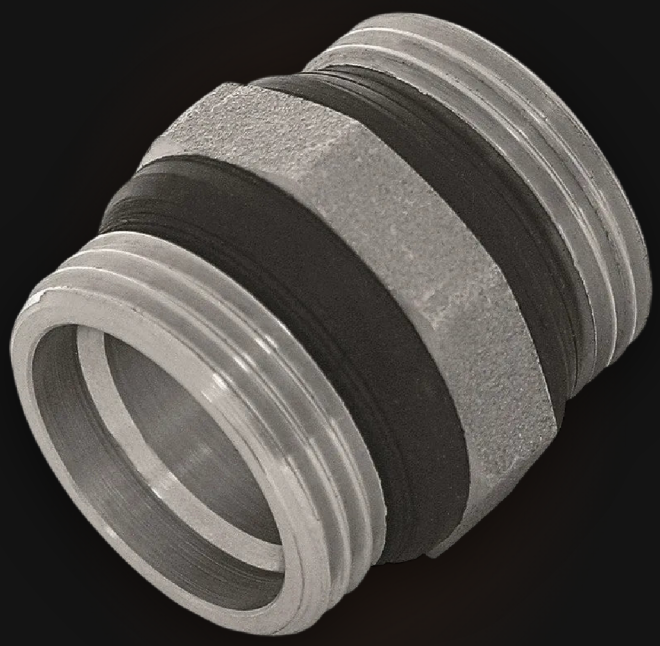

01 · IN THE BOX

What you get

- 1 straight connector with O-rings

02 · YOU WILL NEED

Tools and materials

- Spanners

03 · SAFETY

Before you start

- Installation should be carried out by a competent installer, in line with the system design and BS EN 1264.
- Isolate and drain down, or isolate with the manifold ball valves, before working on a filled system.
- Hot water and pressure can cause injury. Let the system cool and release pressure before opening any joint.

04 · INSTALLATION

Fit it in 3 steps.

1. Check the O-rings are in place and undamaged.
2. Screw the connector into the first female part, then the second.
3. Tighten until the O-ring faces seat. Do not use PTFE or hemp.

05 · TESTING AND COMMISSIONING

Test, check, then hand over

- [x] Check for weeps during the pressure test.

06 · QUESTIONS

Asked by installers

Do I need PTFE or hemp?


No. The O-ring makes the seal.

What can I connect with it?

Two 1" female parts, such as manifold sections, ball valves, pump sets or end units.

07 · WORKS WITH

Parts that fit with it

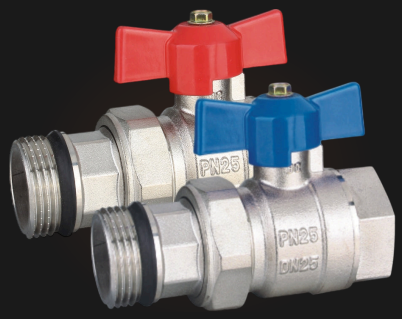

Manifold Ball Valve Set 1" (female x female type)



1 Port Dualmix Manifold Extension



1" Male Manifold Blanking Plug

ALSO WORKS WITH

1 Port Dualmix Extension

08 · JOB RECORD

Fill in on site, keep for the handover

Site / room

Installed by

Date

Test result

Notes

SCAN ME

Watch how it works and fits

Point your phone camera at the code to watch the video.

QUESTIONS ON SITE?

sales@maxheatufh.com **07539 499069**

WEB
maxheatufh.com

DELIVERY
Order by 12pm for next working day delivery