MLCP COMPRESSION FITTINGS

16mm MLCP Compression Elbow

90° elbow for 16 x 2.0mm multilayer.

Turns 16 x 2.0mm multilayer pipe through 90 degrees. A brass body with an insert, olive and nut on each end, made with spanners and no press tool. Ideal for repairs and awkward runs.

CODE

MHF1-E1216x1216 C

PRODUCT



01 · IN THE BOX

What you get

- 1 compression elbow: body, 2 inserts, 2 olives, 2 nuts

02 · YOU WILL NEED

Tools and materials

- Multilayer pipe cutter
- Pipe Reaming Tool
- Two spanners

03 · SAFETY

Before you start

- Installation should be carried out by a competent installer, in line with the system design and current water and heating regulations.
- Isolate, drain and release the pressure before cutting into or working on a filled system.
- Use only the press jaw profile and size made for the fitting, and check every joint is pressed before filling.

04 · INSTALLATION

Fit it in 4 steps.

1. Check the pipe is 16 x 2.0mm (printed on the pipe).
2. Cut each pipe end square and ream it so the insert slides in cleanly.
3. Slide the nut and olive onto the pipe, then push the pipe fully onto the insert.
4. Tighten the nut by hand, then finish with a spanner while holding the body with a second spanner. Do not overtighten.

05 · TESTING AND COMMISSIONING

Test, check, then hand over

- [x] Check both ends for weeps during the pressure test.

06 · QUESTIONS

Asked by installers

Which pipe does it fit?


16mm multilayer pipe with a 2.0mm wall, PERT-AL-PERT or PEX-AL-PEX.

Is it sold singly?

Yes. It's sold as a single fitting.

07 · WORKS WITH

Parts that fit with it

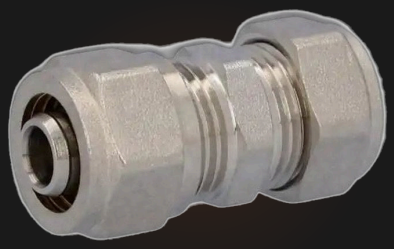

16mm MLCP Compression Coupling



PERT-AL-PERT Multilayer Pipe



Pipe Reaming Tool

08 · JOB RECORD

Fill in on site, keep for the handover

Site / room

Installed by

Date

Test result

Notes

SCAN ME

Watch how it works and fits

Point your phone camera at the code to watch the video.

QUESTIONS ON SITE?

sales@maxheatufh.com 07539 499069

WEB
maxheatufh.com

DELIVERY
Order by 12pm for next working day delivery